


PROD. NO.	A	B	C	D	E	F	H	K	M	SLIDE LENGTH	TRAVEL LENGTH
800	192.0 (7.56)	192.0 (7.56)	224.0 (9.61)	128.0 (5.04)	192.0 (7.56)			160.0 (6.30)	160.0 (6.30)	800.25 (31.496)	811.0 (31.872)
700	128.0 (5.04)	192.0 (7.56)	224.0 (9.61)	192.0 (7.56)	128.0 (5.04)	96.0 (3.78)				700.25 (27.568)	711.2 (27.999)
650	128.0 (5.04)	192.0 (7.56)	96.0 (3.78)	96.0 (3.78)	192.0 (7.56)			160.0 (6.30)		650.25 (25.600)	660.4 (25.999)
600	128.0 (5.04)	128.0 (5.04)	96.0 (3.78)	96.0 (3.78)	192.0 (7.56)			96.0 (3.78)		600.25 (23.631)	609.6 (23.999)
550	128.0 (5.04)	96.0 (3.78)	96.0 (3.78)	96.0 (3.78)	192.0 (7.56)		515.0 (2.03)	64.0 (2.52)	96.0 (3.78)	550.25 (21.663)	558.8 (21.999)
500	128.0 (5.04)	64.0 (2.52)	128.0 (5.04)	192.0 (7.56)	96.0 (3.78)				96.0 (3.78)	500.25 (19.694)	508.0 (19.999)
450	128.0 (5.04)		96.0 (3.78)	96.0 (3.78)	160.0 (6.30)					450.25 (17.726)	457.2 (17.999)
400	96.0 (3.78)		96.0 (3.78)	96.0 (3.78)	128.0 (5.04)					400.25 (15.757)	406.4 (15.999)
350			96.0 (3.78)	160.0 (6.30)						350.25 (13.789)	355.6 (13.999)
300			96.0 (3.78)	128.0 (5.04)						300.25 (11.820)	304.8 (11.999)
250			96.0 (3.78)							250.25 (9.852)	254.0 (9.999)
PROD. NO.	A	B	C	D	E	F	H	K	M	SLIDE LENGTH	TRAVEL LENGTH

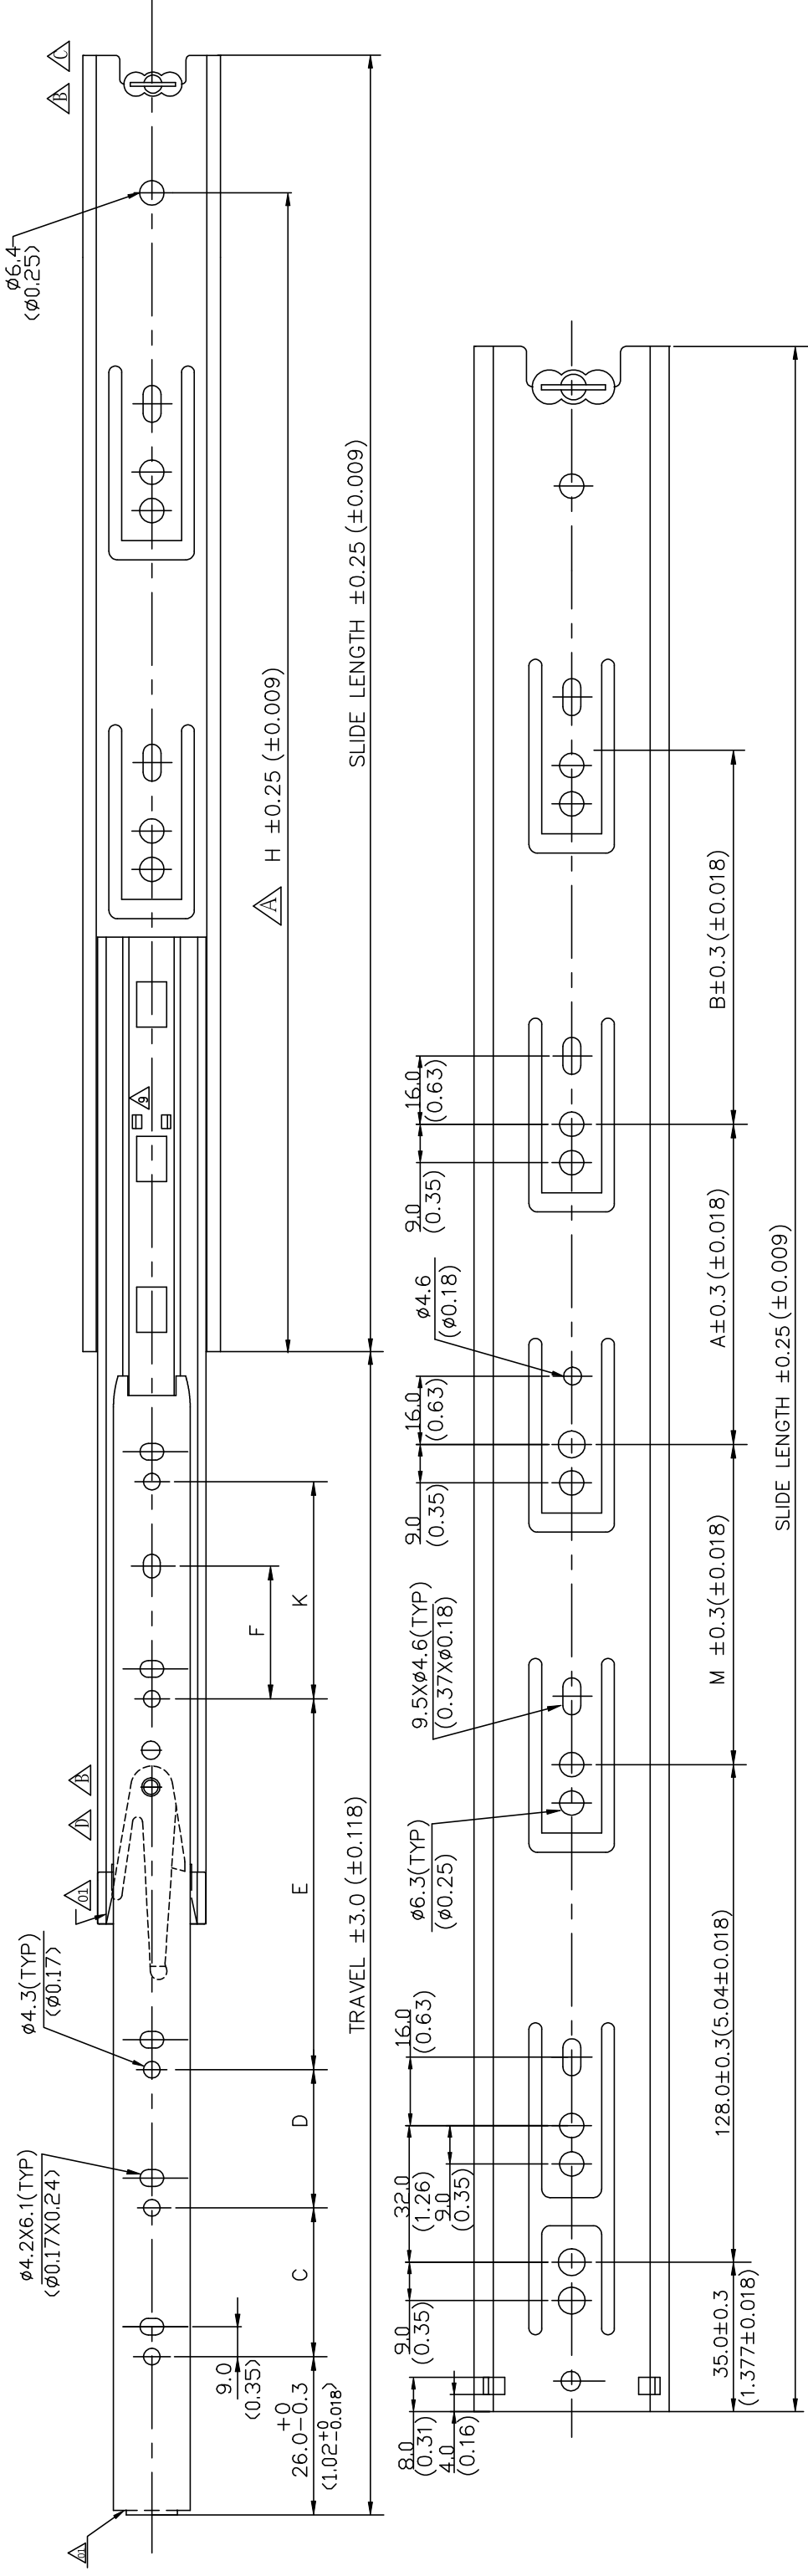

NOTES:

- Material Spec: Slide member - cold rolled steel, retainer - galvanized steel, bearing - carbonized steel, lubricant - anti-wear, high-low temperature grease
- Loading: 100# (45 kgf) based on 18"
- Functional temperature: 5 degree C to 35 degree C (room temperature)
- Finish: zinc plated
- (P1)/betent force : 1.2± 0.4kgf/piece
- (P2)/roll force : 0.3-1.0kgf/piece
- slide must be measured at the area where ball bearings fully support for slide thickness
- Slide is provided with disconnect

TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED

.XX(.XXX)	±0.30(±0.012)
.X(.XX)	±0.76(±0.03)
HOLE	±0.15(±0.006)
ANGLE	±1°

SCALE: mm [in]
UNIT: mm [in]
CLASSIFICATION:

REV	DATE	DESCRIPTION	DRW	CUSTOMER P/N:
				CUSTOMER
				APPD:
				CKD:

Handelsvertretung Blömeling
... wir bringen Sie auf die richtige Schiene

MODEL: TSS4613
P/N:
FINISH:
SHEET 1 OF 1