


SIZE	SL	TL	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm
8"	7.87 (200.0)	8.10 (205.8)	/	/	/	/	/	5.04 (128.0)	/	/	/	7.69 (195.3)	/
10"	9.84 (250.0)	10.04 (255.0)	/	/	/	/	7.12 (180.8)	4.06 (103.0)	6.85 (174.0)	/	/	9.67 (245.3)	197.0 (7.756)
12"	11.81 (300.0)	11.50 (292.0)	/	/	/	/	9.09 (230.8)	5.04 (128.0)	8.82 (224.0)	/	/	11.63 (295.3)	247.0 (9.724)
14"	13.78 (350.0)	14.00 (356.0)	/	/	/	/	11.06 (280.8)	5.04 (128.0)	8.82 (224.0)	/	/	13.59 (345.3)	297.0 (11.693)
16"	15.75 (400.0)	16.00 (406.0)	/	/	/	/	13.03 (330.8)	5.04 (128.0)	8.82 (224.0)	/	12.60 (320.0)	15.56 (395.3)	347.0 (13.661)
18"	17.72 (450.0)	18.00 (457.0)	/	/	12.6 (320.0)	/	14.99 (380.8)	5.04 (128.0)	8.82 (224.0)	/	13.86 (352.0)	17.53 (445.3)	397.0 (15.630)
20"	19.69 (500.0)	20.00 (508.0)	/	/	12.6 (320.0)	/	16.96 (430.8)	5.04 (128.0)	8.82 (224.0)	/	16.38 (416.0)	19.50 (495.3)	447.0 (17.598)
22"	21.65 (550.0)	22.00 (559.0)	8.82 (224.0)	/	/	16.38 (416.0)	18.93 (480.8)	5.04 (128.0)	8.82 (224.0)	13.86 (352.0)	/	21.47 (545.3)	497.0 (19.567)
24"	23.62 (600.0)	24.00 (610.0)	8.82 (224.0)	/	16.38 (416.0)	/	20.90 (530.8)	5.04 (128.0)	8.82 (224.0)	13.86 (352.0)	18.90 (480.0)	23.44 (595.3)	547.0 (21.535)
26"	25.59 (650.0)	26.00 (660.0)	8.82 (224.0)	/	16.38 (416.0)	21.42 (544.0)	22.87 (580.8)	5.04 (128.0)	8.82 (224.0)	13.86 (352.0)	21.42 (544.0)	25.41 (645.3)	597.0 (23.504)
28"	27.56 (700.0)	28.00 (711.0)	8.82 (224.0)	11.34 (288.0)	16.38 (416.0)	21.42 (544.0)	24.84 (630.8)	5.04 (128.0)	8.82 (224.0)	13.86 (352.0)	21.42 (544.0)	27.37 (695.3)	647.0 (25.472)

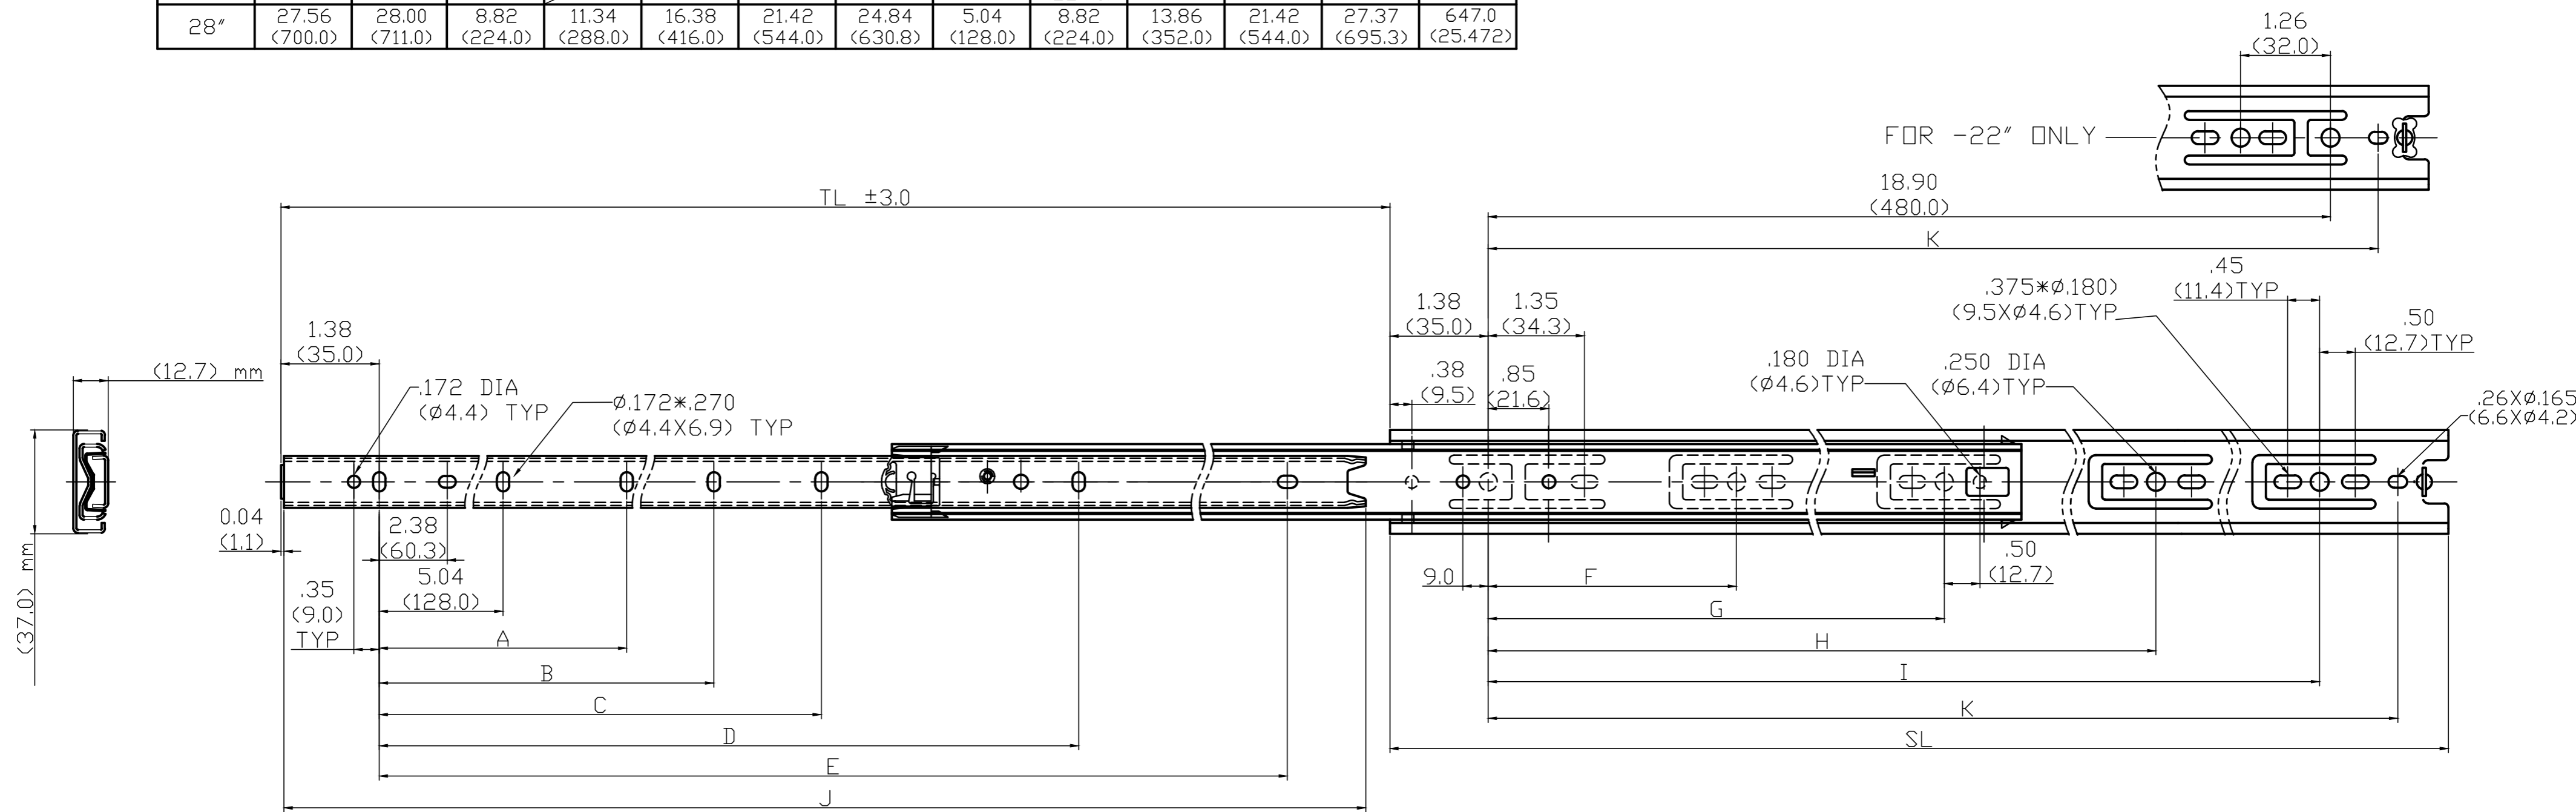

NOTES:
1.Material Spec:Slide member - cold rolled steel,retainer - galvanized steel, bearing - carbonized steel, lubricant - anti-wear,high-low temperature grease
2.Loading: 75# (32 kgf) based on 18"
3.Functional temperature:5 degree C to 35 degree C (room temperature)
4.Finish: zinc plated
5.(P1)/Detent force : 1.2± 0.4kgf/piece
6.(P2)/pull force : 0.3~1.0kgf/piece
7.slide must be measured at the area where ball bearings fully support for slide thickness
8.Slide is provided with disconnect

TOLERANCES ARE FOLLOWS UNLESS OTHERWISE SPECIFIED	
XXX.XXX	±0.30(±0.012)
.XX.XX	±0.76(±0.03)
HOLES	±0.15(±0.006)
ANGLE	±1°
SCALE:	
UNIT:	mm[in]
CLASSIFICATION:	

REV	DATE	DESCRIPTION	DRW
△			

DRW:	CUSTOMER P/N:
DATE: 2002/01/25	CUSTOMER
CKD:	APPD:

TITLE:	MODEL: TSS 3513
MATERIAL:	P/N:
FINISH:	SHEET 1 OF 1